





PRODUCT SPECIFICATION

"T" JUNCTION

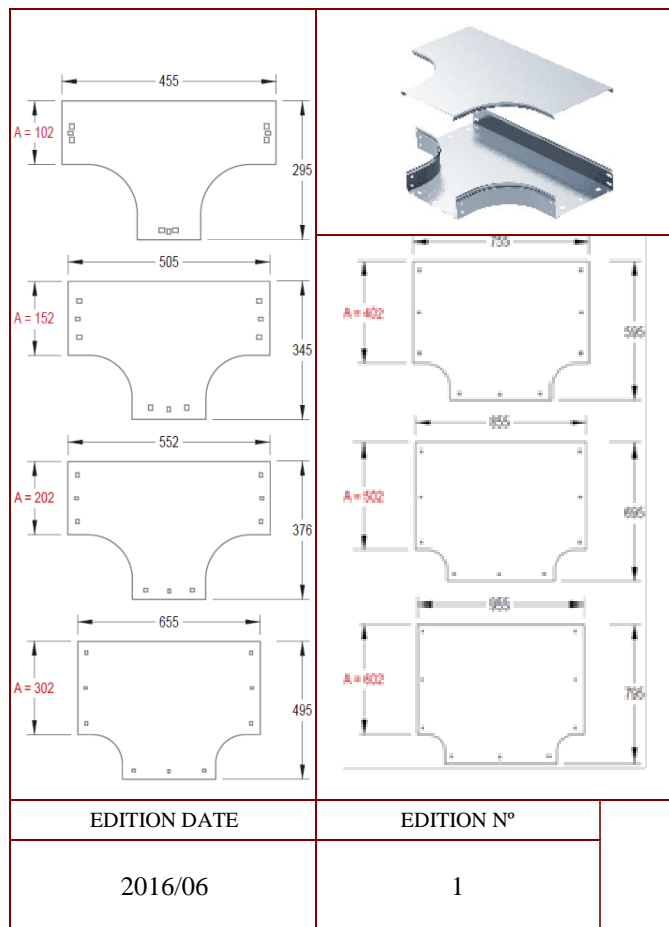

G.S.	Δ (kg/m)	G.C.	Δ (kg/m)	A (mm)	
DHTS0310	0,88	DHTG0310	0,97	100	1
DHTS0315	1,21	DHTG0315	1,33	150	1
DHTS0320	1,59	DHTG0320	1,75	200	1
DHTS0330	2,41	DHTG0330	2,65	300	1
DHTS0610	0,94	DHTG0610	1,04	100	1
DHTS0615	1,13	DHTG0615	1,24	150	1
DHTS0620	1,53	DHTG0620	1,69	200	1
DHTS0630	2,70	DHTG0630	2,97	300	1
DHTS0640	3,03	DHTG0640	3,33	400	1
DHTS0650	4,69	DHTG0650	5,16	500	1
DHTS0660	6,13	DHTG0660	6,74	600	1
DHTS0810	1,18	DHTG0810	1,29	100	1
DHTS0815	1,36	DHTG0815	1,50	150	1
DHTS0820	1,66	DHTG0820	1,82	200	1
DHTS0830	2,39	DHTG0830	2,63	300	1
DHTS0840	3,21	DHTG0840	3,53	400	1
DHTS0850	4,44	DHTG0850	4,89	500	1
DHTS0860	5,57	DHTG0860	6,13	600	1
DHTS1010	1,23	DHTG1010	1,35	100	1
DHTS1015	1,51	DHTG1015	1,66	150	1
DHTS1020	1,81	DHTG1020	1,99	200	1
DHTS1030	2,91	DHTG1030	3,20	300	1
DHTS1040	3,39	DHTG1040	3,72	400	1
DHTS1050	5,13	DHTG1050	5,64	500	1
DHTS1060	6,51	DHTG1060	7,16	600	1

EDITION DATE

EDITION N°

2016/06

1

ACCORDING TO UNE-EN 61537-2007

SENDIZIMIR GALVANISATION ACCORDING TO UNE-EN 10346:2010.
HOT DIP GALVANISED ACCORDING TO UNE-EN ISO 1461:2010

CHARACTERISTICS OF INSTALLATION

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT
ACCORDING TO THE R.E.B.T.

- COPY NO CONTROLLED. THIS INFORMATION COULD BE MODIFIED BY AISCAN WITHOUT PREVIOUS NOTICE.