




PRODUCT SPECIFICATION

INSIDE METAL SLEEVE MMI

TYPE	COMPOSITION	D	d $\pm 0,2$	L	UNITS/BOX
AISCAN-MMI-16	STEEL	M16X1,5	13,6	30	50
AISCAN-MMI-20	“	M20X1,5	17,6	35	50
AISCAN-MMI-25	“	M25X1,5	22,6	40	40
AISCAN-MMI-32	“	M32X1,5	29,2	43	40
AISCAN-MMI-40	“	M40X1,5	37,2	43	25
AISCAN-MMI-50	“	M50X1,5	47,2	52	10
AISCAN-MMI-63	“	M63X1,5	59,6	63	9
EDITION DATE	EDITION NUMBER	CARD NUMBER			
2009/02	2	EP-MMI			

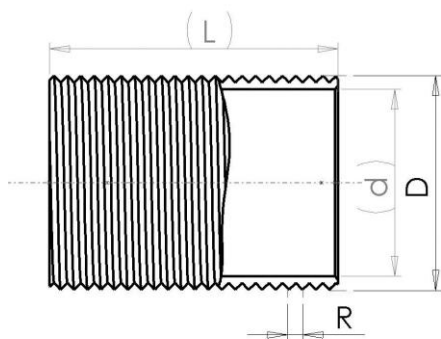

SPECIFICATIONS ACCORDING TO STANDARD UNE-EN 61386-21

- CODE: 555711542010
- OPERATING TEMPERATURE RANGE: $-45 + 400^{\circ}\text{C}$
- CRUSHING STRENGTH: $> 4000\text{N}$
- IMPACT RESISTANCE: $> 20\text{J}$ AT -45°C
- CORROSION RESISTANCE: MEDIUM
- FLAME PROPAGATE: NO
- MATERIAL: COLD ROLLED STEEL WITH LOW CONTENT CARBON. QUALITY TYPE DC03, IN ACCORDING TO STANDARD EN-10130. ELECTRO-GALVANIZED FINISH.

- NO CONTROLLED COPY. THIS INFORMATION COULD BE MODIFIED BY AISCAN WHITOUT PREVIOUS ADVERTISMENT.-